

TGS 821 - Special Sensor for Hydrogen Gas

Features:

- * High sensitivity and selectivity to hydrogen gas
- * Good repeatability in measurement and excellent stability
- * Uses simple electrical circuit
- * Ceramic base resistant to severe environment

The sensing element of Figaro gas sensors is a tin dioxide (SnO_2) semiconductor which has low conductivity in clean air. In the presence of a detectable gas, the sensor's conductivity increases depending on the gas concentration in the air. A simple electrical circuit can convert the change in conductivity to an output signal which corresponds to the gas concentration.

The **TGS 821** has high sensitivity and selectivity to hydrogen gas. The sensor can detect concentrations as low as 50ppm, making it ideal for a variety of industrial applications.


The figure below represents typical sensitivity characteristics, all data having been gathered at standard test conditions (see reverse side of this sheet). The Y-axis is indicated as *sensor resistance ratio* (R_s/R_o) which is defined as follows:

R_s = Sensor resistance of displayed gases at various concentrations

R_o = Sensor resistance at 100ppm of hydrogen

Applications:

- * Hydrogen gas detection for:
 - transformer maintenance
 - batteries
 - steel industry usage
 - etc.

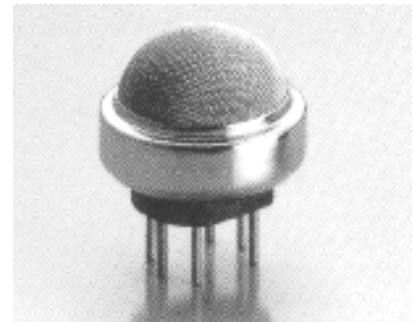


The figure below represents typical temperature and humidity dependency characteristics. Again, the Y-axis is indicated as *sensor resistance ratio* (R_s/R_o), defined as follows:


R_s = Sensor resistance at 100ppm of hydrogen at various temperatures/humidities

R_o = Sensor resistance at 100ppm of hydrogen at 20°C and 65% R.H.


Sensitivity Characteristics:

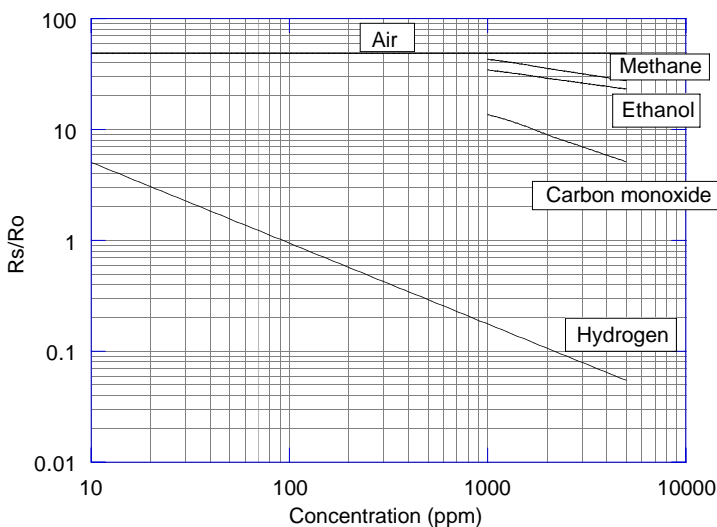

Temperature/Humidity Dependency:

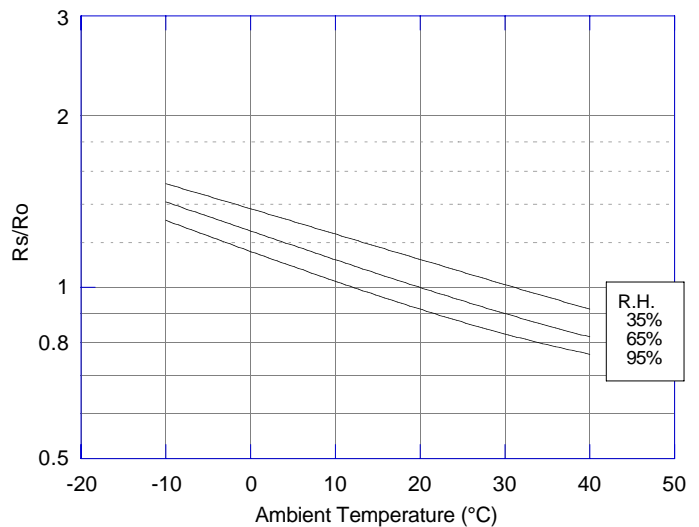

Structure and Dimensions:

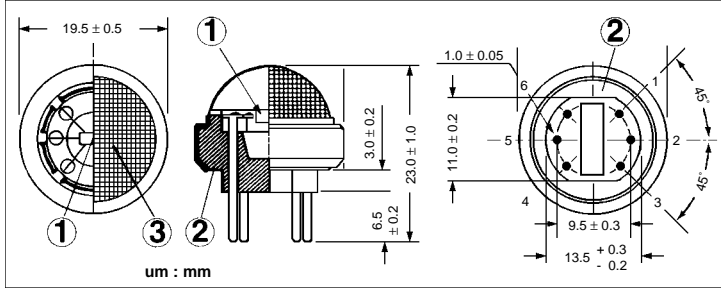


- ① Sensing Element:
SnO₂ is sintered to form a thick film on the surface of an alumina ceramic tube which contains an internal heater.
- ② Sensor Base:
Alumina ceramic
- ③ Flame Arrestor:
100 mesh SUS 316 double gauze

Pin Connection and Basic Measuring Circuit:

The numbers shown around the sensor symbol in the circuit diagram at the right correspond with the pin numbers shown in the sensor's structure drawing (*above*). When the sensor is connected as shown in the basic circuit, output across the Load Resistor (V_{RL}) increases as the sensor's resistance (R_s) decreases, depending on gas concentration.

Basic Measuring Circuit:

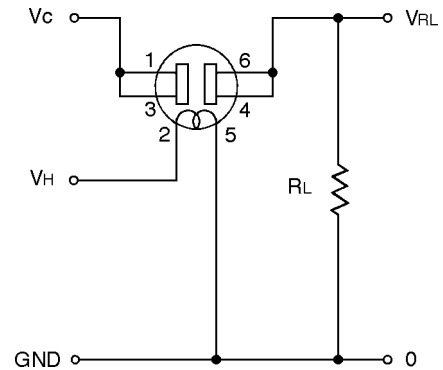

Standard Circuit Conditions:

Item	Symbol	Rated Values	Remarks
Heater Voltage	V_H	$5.0 \pm 0.2V$	AC or DC
Circuit Voltage	V_C	Max. 24V	DC only $P_s \leq 15mW$
Load Resistance	R_L	Variable	$0.45k\Omega$ min.

Electrical Characteristics:

Item	Symbol	Condition	Specification
Sensor Resistance	R_s	Hydrogen at 100ppm/air	$1k\Omega \sim 10k\Omega$
Change Ratio of Sensor Resistance	R_s/R_o	$\frac{\text{Log}[R_s(H_2 \text{ 100ppm})/R_s(H_2 \text{ 1000ppm})]}{\text{Log}(1000ppm/100ppm)}$	$0.60 \sim 1.20$
Heater Resistance	R_H	Room temperature	$38.0 \pm 3.0\Omega$
Heater Power Consumption	P_H	$V_H=5.0V$	660mW (typical)

Standard Test Conditions:

TGS 821 complies with the above electrical characteristics when the sensor is tested in standard conditions as specified below:

- Test Gas Conditions: $20^\circ \pm 2^\circ C, 65 \pm 5\% R.H.$
- Circuit Conditions: $V_C = 10.0 \pm 0.1V$ (AC or DC),
 $V_H = 5.0 \pm 0.05V$ (AC or DC),
 $R_L = 4.0k\Omega \pm 1\%$
- Preheating period before testing: More than 7 days

Sensor Resistance (R_s) is calculated by the following formula:

$$R_s = \left(\frac{V_C}{V_{RL}} - 1 \right) \times R_L$$

Power dissipation across sensor electrodes (P_s) is calculated by the following formula:

$$P_s = \frac{V_C^2 \times R_s}{(R_s + R_L)^2}$$