

**产品介绍/Introduction**

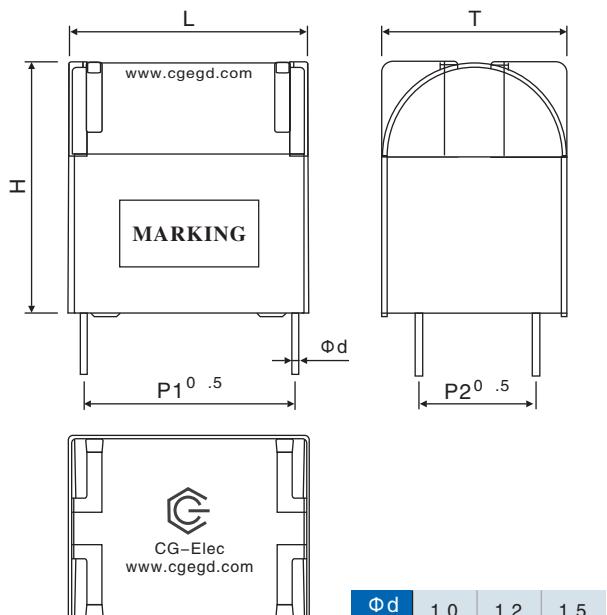
采用金属化聚丙烯薄膜进行无感式卷绕，特殊喷金工艺，阻燃塑料壳封装，阻燃环氧树脂灌封，镀锡铜线或铜插片引出。具有频率特性好，杂散电感小，过电流能力强，稳定性好的特点，主要用于UPS、小功率变频器、逆变器、电镀电源、逆变焊机、感应加热等电力电子设备用作直流滤波。

Non-inductive winding with metallized polypropylene film, special metal spray, flame retardant plastic shell encapsulation, flame retardant epoxy potting, tin plated copper wire or copper sheet poles. good frequency characteristic and low stray inductance, strong over-current capability, good stability characteristics, mainly used in UPS, small power inverter, inverter, plating power supply, inverter welding machine, induction heating power for dc filter.

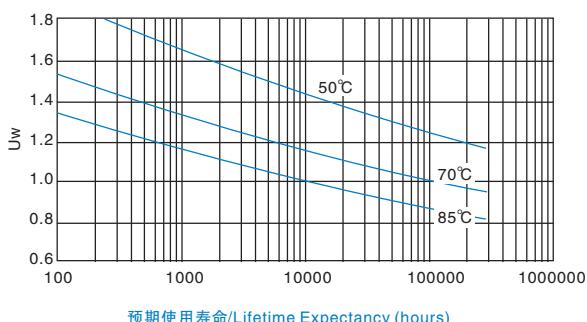
**性能指标/Technical data**

引用标准 Reference	GB/T17702, IEC61071
容量范围 Capacitance	1~80 $\mu$ F
容量偏差 Capacitance Tol.	5% (J), 10%(K)
电压范围 Voltage	250V.DC~1000V.DC
极间耐压 U <sub>T-T</sub>	1.5U <sub>n</sub> /10s
	1.1Un ( 30% of on-load-dur. )
过电压 Over Voltage	1.15Un ( 30min/day )
	1.2Un ( 5min/day )
	1.3Un ( 1min/day )
介质损耗角 tg δ <sub>0</sub>	tg δ <sub>0</sub> ≤0.0002
绝缘电阻 R <sub>iXCr</sub>	≥5000s ( 20°C 5 °C 100V.DC 60s )
耐电流冲击能力 dv/dt	>30V/ $\mu$ s
气候类别 Climatic Category	40/85/56
工作温度范围 Operating Temp.	-40°C~85°C ( θ h.s≤85°C )
储存温度范围 Storage Temp.	-40°C~85°C
引出方式 Lead Methods	插针、插片
使用海拔 Max. Altitude	<2000m
预期寿命 Lifetime Expectancy	100000h ( θ h.s=70°C )
封装形式 Encapsulation	塑料外壳, 黑色环氧
阻燃性 Flame retardation	UL94V-0

注：海拔使用高度超过2000m，应该考虑海拔对冷却和绝缘的影响。

**外型及尺寸/Outline drawing**

Φd 1.0 | 1.2 | 1.5

**预期使用寿命/Lifetime expectancy for MKP-LM**

预期使用寿命/Lifetime Expectancy (hours)

工作电压/Uw:permanent working or operating DC-voltage

**典型线路图/Typical circuit**